

## GENERAL STATEMENTS

The KK/X weighing hook is a self powered electronic dynamometer trully valuable for weight control at entrancy and exit of products, inventories, stock weighing, order checking, business deals...

The weighing hook KK/X has been designed to be hung from the bridge crane, hoist or crane.

No installation required. Capacities up to 35tn.

## TECHNICAL CHARACTERISTICS

Infrared remote control having the following functions: added memory of partial weights, total, memory reset and the other basic functions. Max. distance 30m.

ON/OFF push button.

ZERO push button.

TARE push button (acumulative over 100% nominal load).

TARE erase.

Automatic self-disconnection after 3 min.

Automatic self-disconnection when very low battery.

Low battery message indicator.

Battery tension indicator.

TARE indicator.

ZERO indicator.

Weight unit indicator (kg, t or lb).

8-10h battery autonomy. Charge in 10- 12 hr.

IP-54 steel protection case.

LED display with 5 digits of 60 mm. height.

Elevation accessories: 1 ring, 2 shackles and one revolving hook .

Breaking strength > 500% nominal capacity.

Accuracy class III (3.000 divisions).

Feed: rechargeable battery.

Working temperatuyre -10°C + 40°C.

Accuracy: 0,1%.

## OPTIONALS

Max. value indicator.


Weight transmission via radio to Motorman displays.

Maximum peak indicator.

INOX.

24hr. service (tow interchangeable batteries and one battery charger).

## WEIGHING HOOK MODEL KK/X

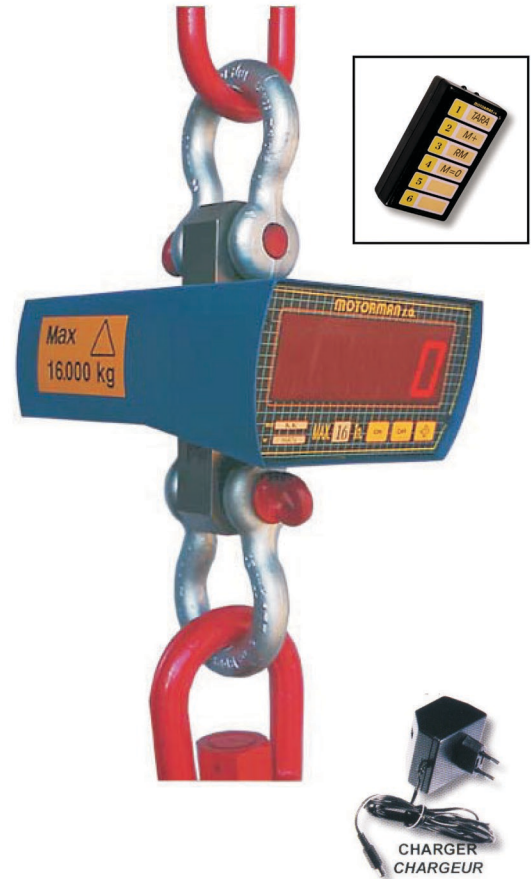

## DIMENSIONS:

CUADRO DE DIMENSIONES KK								PESOS	
TIPO Y CAPACIDAD Kgs/Tn	DIVISIONES Kgs	DIMENSIONES		ALTURAS				Sin acces. de elevac. Kg	Con Anilla grilletes y gancho Kg
		b	Ø d	L <sub>1</sub>	L <sub>2</sub>	L <sub>3</sub>	L <sub>4</sub>		
KK 2.000	1	26	21	200	282	562	435	9	11
KK 3.200	1	26	21	200	302	604	464	10	12
KK 6.300	2	36	27	210	352	774	596	14	18
KK 10	5	49	35	242	442	947	725	16	33
KK 12	10	49	35	242	442	947	725	16	35
KK 16	10	57	43	270	562	1130	864	18	48
KK 20	10	68	52	280	636	1360	1057	19	60
KK 25	10	68	52	280	636	1360	1057	19	64
KK 32	10	68	59	310	704	1520	1163	23	79

